


Home Products Distributors What's New Applications **Engineering Design & Installation** MSDS Contact

# RED THREAD® IIA

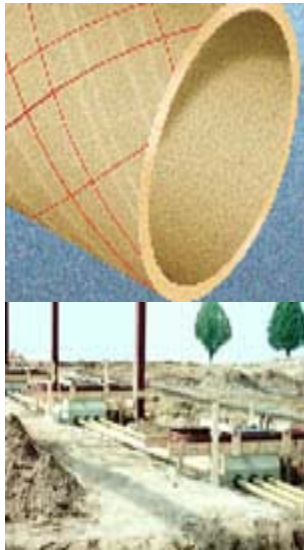

Size Range	2" - 6"
Construction	Filament wound with epoxy resin and fiberglass
Inner Corrosion Barrier	unlined
Temperature Range	Up to 150° F / 65° C
Pressure Ratings	250 psig
Joint Types	T.A.B.™ (Threaded and Bonded) or Bell and Flange
Service	Petroleum products, alcohols, alcohol-gasoline mixtures, ethanol, methanol, MTBE

**RED THREAD® IIA 2" - 4" piping carries the UL label for conveying petroleum products, also alcohol-gasoline mixtures, including ethanol, methanol, and MTBE underground. These products are also UL Listed for conveying petroleum products gasoline mixtures and up to 100% ethanol. The T.A.B.™ (Threaded and Bonded) joint offers quick installation for piping runs.**

**The following Documents are available for viewing**

B2101 Pipe & Fittings Bulletin

**[or Click here for Installation of all Petroleum Marketing PDFs](#)**

## Smith Fibercast

2700 West 65th Street Little Rock, Arkansas 72209 USA  
 Phone: (501) 560-4010 Fax: (501) 560-6926

Phone: (501) 568-4010 Fax: (501) 568-6836

25 South Main Street Sand Springs, OK 74063 USA  
Phone:(918) 245-6651 Fax: (918) 245-7566